






C115-C Series

PCB Socket, 1.27mm (0.050"),
SMT Type, Locating Peg

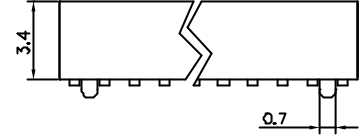

Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: Nylon 6T, UL94V-0

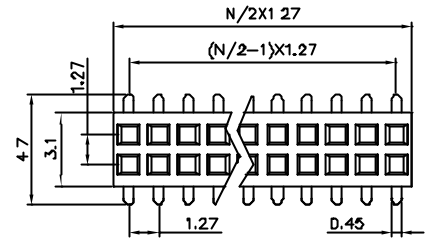

Ordering Information

C115-C-60G


Series No.	Contact Plating:
No. of Pins:	T-Tinned
04-60	G-Gold Flash All Over



C116 Series

Mini Jumper, 2.54mm (0.100")


Type A

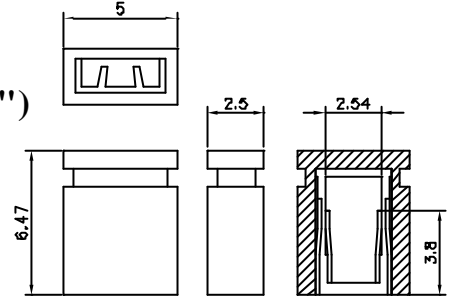

Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

Type B

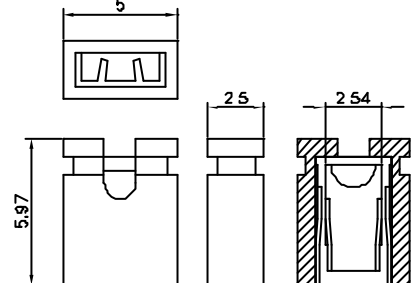

Ordering Information

C116-AGK

Series No.	Insulator Colour:
Type Code:	B-Blue
A, B, C	K-Black
Contact Plating:	R-Red
G-Gold Flash All Over	W-White
	Y-Yellow

Type C

