


C114-A Series

PCB Socket, 2.54mm(0.100")


Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0



<Single Row>

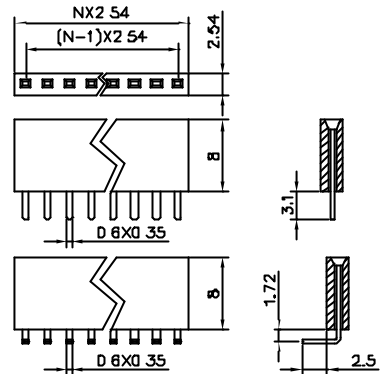

<Dual Row>

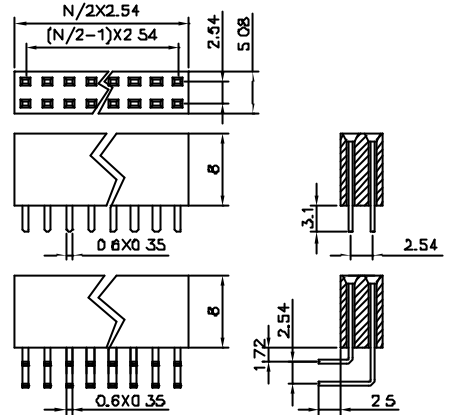

Ordering Information

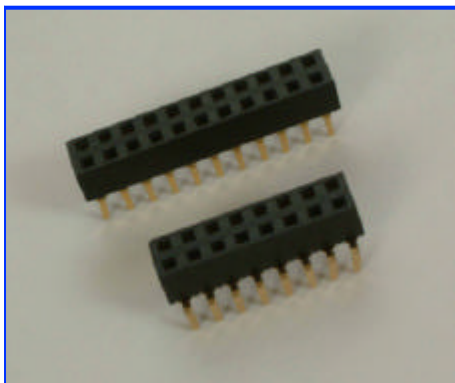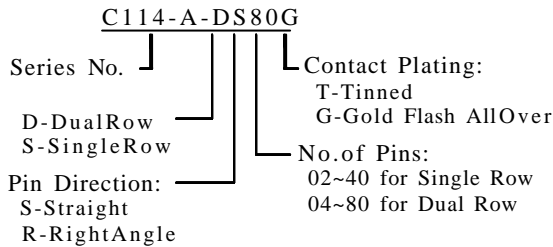


C114-B Series


PCB Socket, 2.54mm(0.100"), Bottom Entry


Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: LCP, UL94V-0

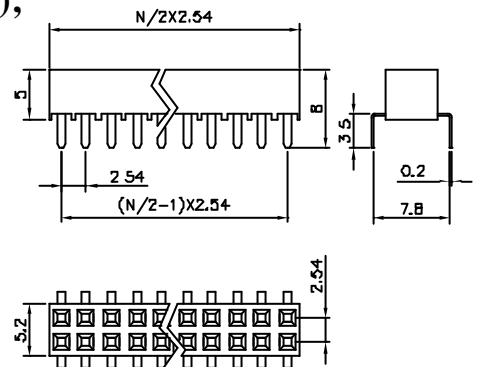

Ordering Information

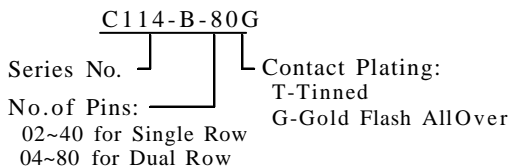

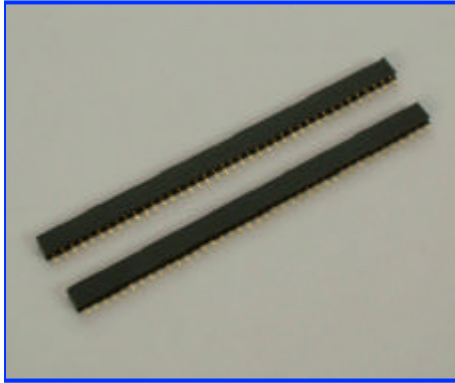


C115-A Series

PCB Socket, 2.0mm(0.079")


Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0



<Single Row>

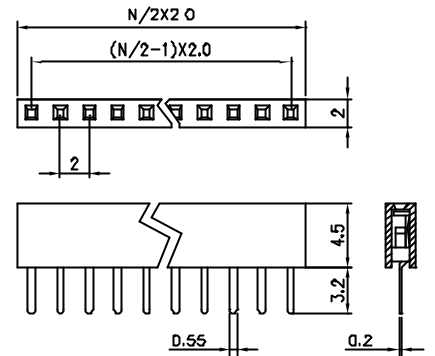

<Dual Row>

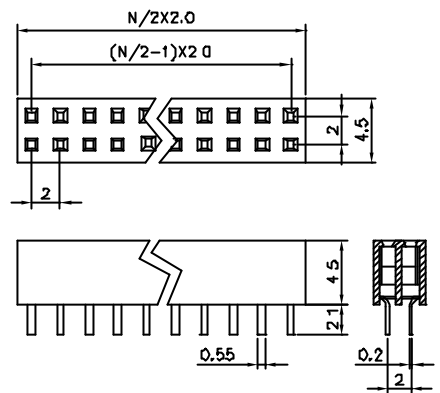

Ordering Information

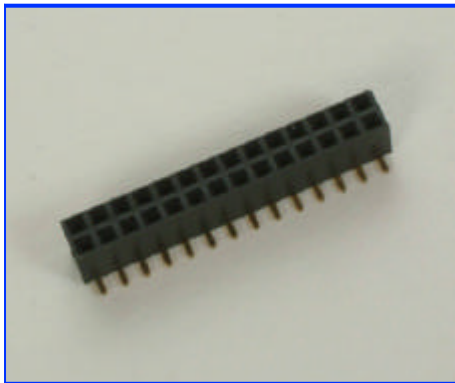
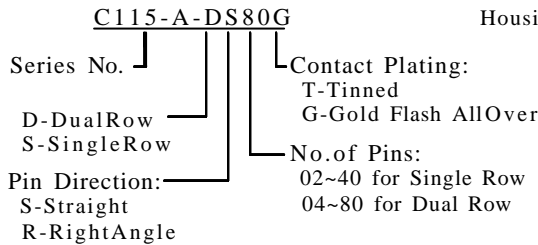


C115-B Series


PCB Socket, 2.0mm(0.079"),
SMT Type

Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: Nylon 6T, UL94V-0

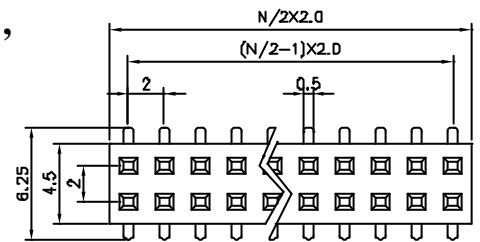

Ordering Information

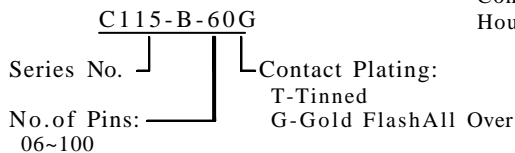






C115-C Series

PCB Socket, 1.27mm (0.050"),
SMT Type, Locating Peg

Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: Nylon 6T, UL94V-0

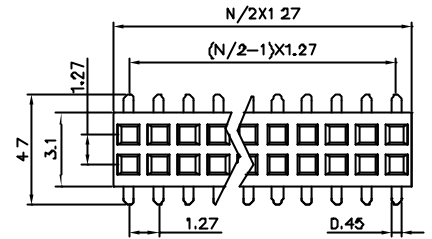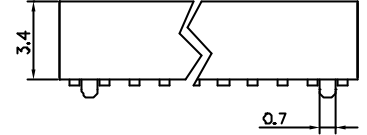

Ordering Information

C115-C-60G

Series No.	Contact Plating:
No. of Pins:	T-Tinned
04-60	G-Gold Flash All Over




C116 Series

Mini Jumper, 2.54mm (0.100")


Specifications:

Contact Resistance: 30mΩ @ 100mADC
 Insulator Resistance: 1000MΩmin. @ 500VDC
 Current Rating: 1AMP
 Voltage: 500VAC For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0


Type A

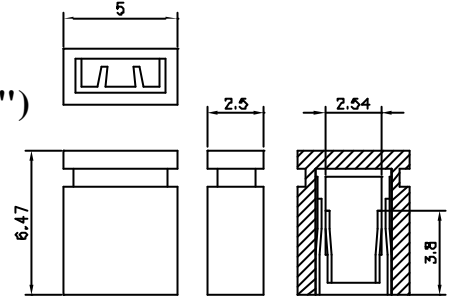

Type B

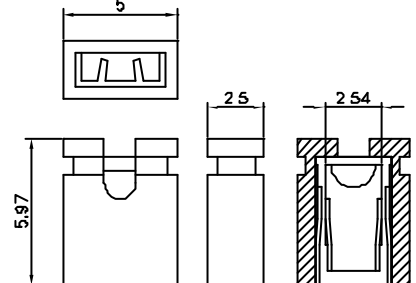

Type C

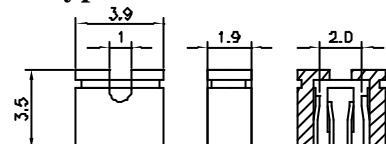

Ordering Information

C116-AGK

Series No.	Insulator Colour:
Type Code:	B-Blue
A, B, C	K-Black
Contact Plating:	R-Red
G-Gold Flash All Over	W-White
	Y-Yellow