


## C129 Series

### PLCC Socket, SMT Type

#### Specifications:


Contact Resistance: 30mΩ @ 100mADC  
 Insulator Resistance: 1000MΩmin. @ 500VDC  
 Current Rating: 1AMP  
 Voltage: 500VAC For 1 minute  
 Operating Temperature: -55°C ~ +105°C  
 Contact: Phosphor Bronze, Stamped  
 Housing: PPS(40% Glass Fiber), UL94V-0  
 or PBT(30% Glass Fiber), UL94V-0

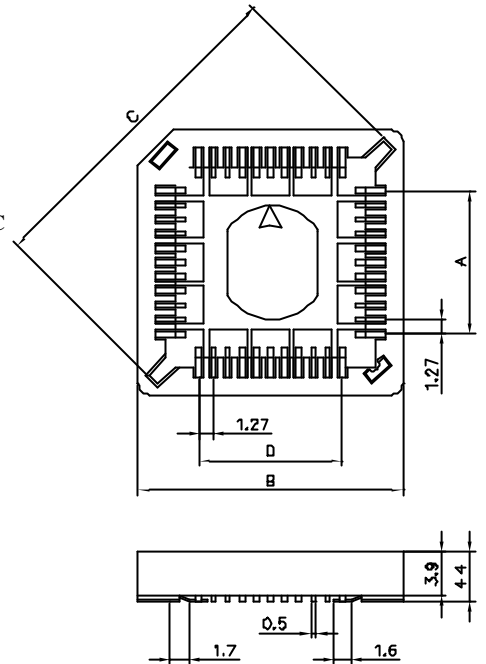

#### Ordering Information

C129-44BT  
 Series No. | Contact Plating:  
 No. of Pins: | T-Tinned  
 28, 32, 44, 52, 68, 84 | Insulator Material:  
 A-PPS  
 B-PBT

Positions	A	B	C	D
28	7.62	18.10	22.20	12.70
32	7.62	18.80	25.70	10.16
44	12.70	23.50	29.80	17.78
52	15.24	26.00	32.64	20.32
68	20.32	30.20	40.10	25.40
84	25.40	35.20	46.90	30.48


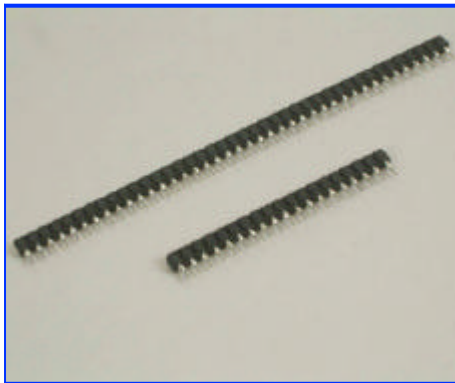


## C131 Series

### Sip Socket, 2.54(0.100\" data-bbox="351 580 622 622"/>

#### Specifications:

Contact Resistance: 15mΩ @ 100mADC  
 Insulator Resistance: 1000MΩmin. @ 500VDC  
 Current Rating: 1AMP  
 Voltage: 250VAC For 1 minute  
 Operating Temperature: -55°C ~ +105°C  
 Contact: BeCu, Stamped  
 Housing: PPS(40% Glass Fiber), UL94V-0

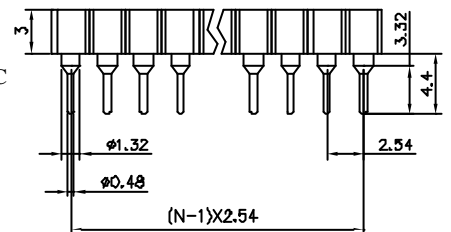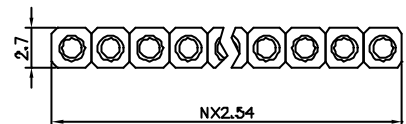

#### Ordering Information

C131-S3005  
 Series No. | Contact Plating(Gold):  
 S-Single Row | 05-5u"  
 No. of Pins: | 10-10u"  
 01~40 for Single Row | 20-20u"  
 | 30-30u"