










C172 Series

**Mini USB-A Male,
4 Pin Solder**

Specifications:

Contact Resistance:10mΩ @ 100mADC
 Insulator Resistance: 500MΩmin. @ 500VDC
 Current Rating:1AMP
 Voltage:500VAC For 1 minute
 Operating Temperature:-55°C~+105°C
 Contact:Brass
 Housing:PBT,UL94V-0

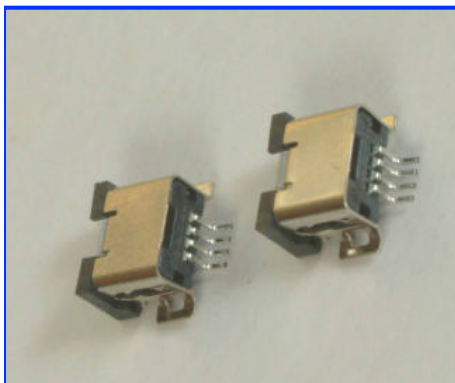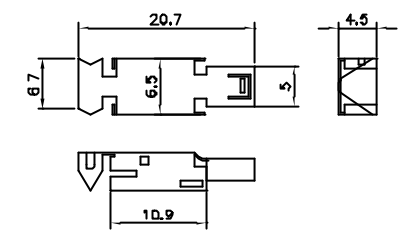

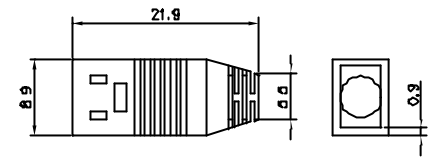


C174 Series

**Mini USB-A Female,
4 Pin SMT or Dip**

Specifications:

Contact Resistance:10mΩ @ 100mADC
 Insulator Resistance: 500MΩmin. @ 500VDC
 Current Rating:1AMP
 Voltage:500VAC For 1 minute
 Operating Temperature:-55°C~+105°C
 Contact:Brass
 Housing:PBT,UL94V-0













C176 Series

USB-A Male,Solder

Specifications:

Contact Resistance:10mΩ @ 100mADC
 Insulator Resistance: 500MΩmin. @ 500VDC
 Current Rating:1AMP
 Voltage:500VAC For 1 minute
 Operating Temperature:-55°C~+105°C
 Contact:Brass
 Housing:PBT,UL94V-0

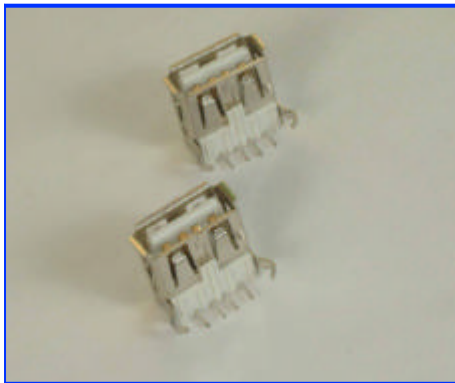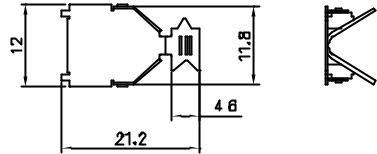



C178 Series

USB-A Female,Solder



Specifications:

Contact Resistance:10mΩ @ 100mADC
 Insulator Resistance: 500MΩmin. @ 500VDC
 Current Rating:1AMP
 Voltage:500VAC For 1 minute
 Operating Temperature:-55°C~+105°C
 Contact:Brass
 Housing:PBT,UL94V-0

<Type A>



<Type B>

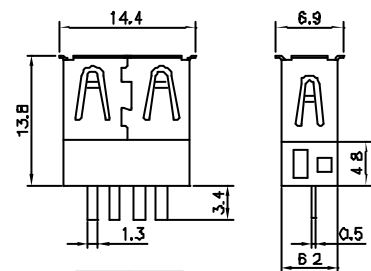

Ordering Information

